


VXP9000 Fast settings

Case Share 1:

Key point----

- 1, Resolution :2960*1520 pixel (W*H)
- 2, Load by 4pcs sending cards
- 3, Link the card as this map
- 4, DVI1A+1B=1520*1520 pixels ;DVI2A+2B=1440&1520 pixels

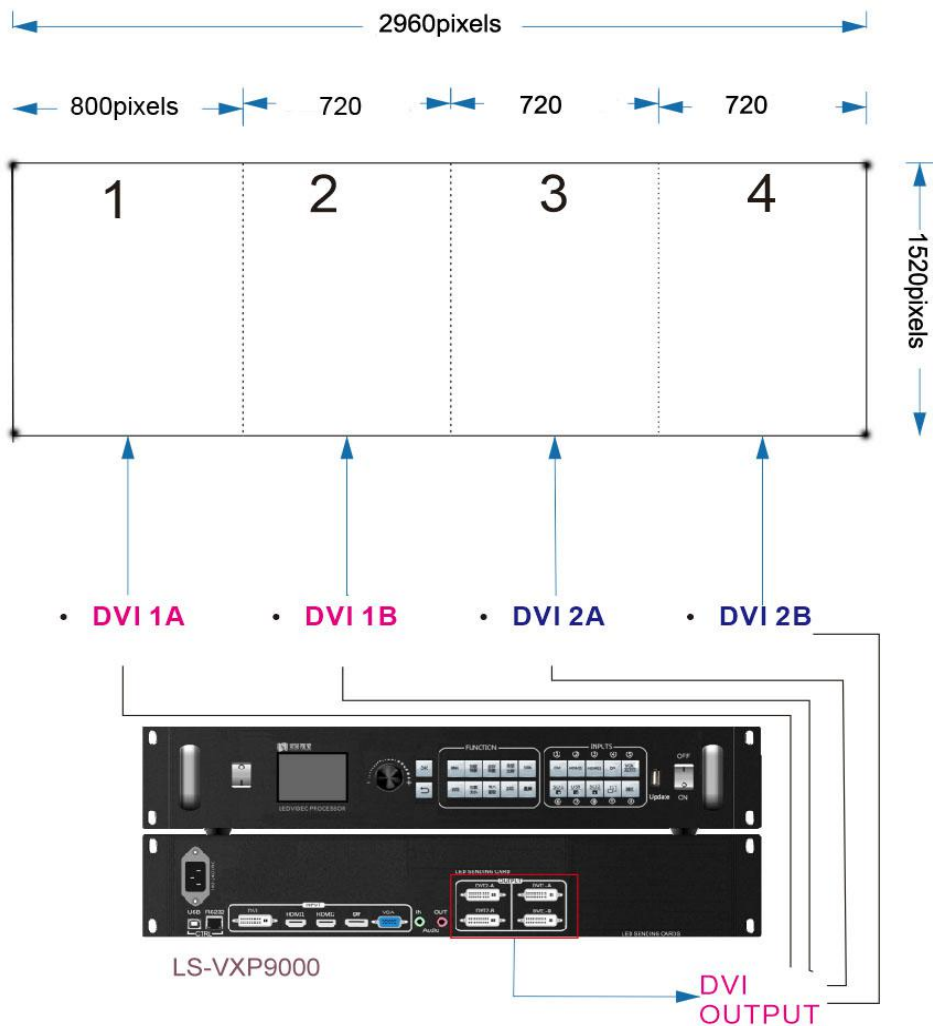


Set steps:


Step 1: Set the VXP9000 output resolution :1520*1520 pixels



Step 2: Set the Sending card 2 (Link with DBI1B) start X:800 ,Y:0 ; Sending card 4 (Link with DVI2B) start X:720,Y:0; set at the sending card software

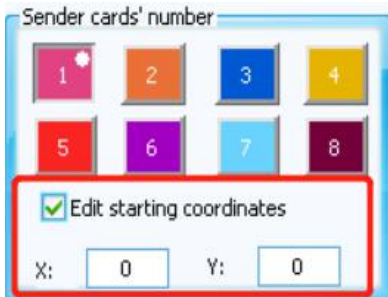

Listen Vision LED Splyer

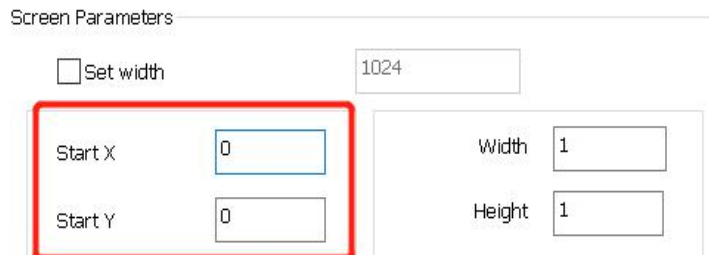

Linsn LEDSet


Step 3: Set the VXP9000 Window to :2960*1520 ,Other settings no need to modify



Case Share 2:

Key point----

- 1, Resolution :2960*1520 pixel (W*H)
- 2, Load by 4pcs sending cards
- 3, Link the card as this map
- 4, DVI1A+1B=1440*1520 pixels ;DVI2A+2B=1520*1520 pixels
(DVI1A+1B < DVI2A+2B)

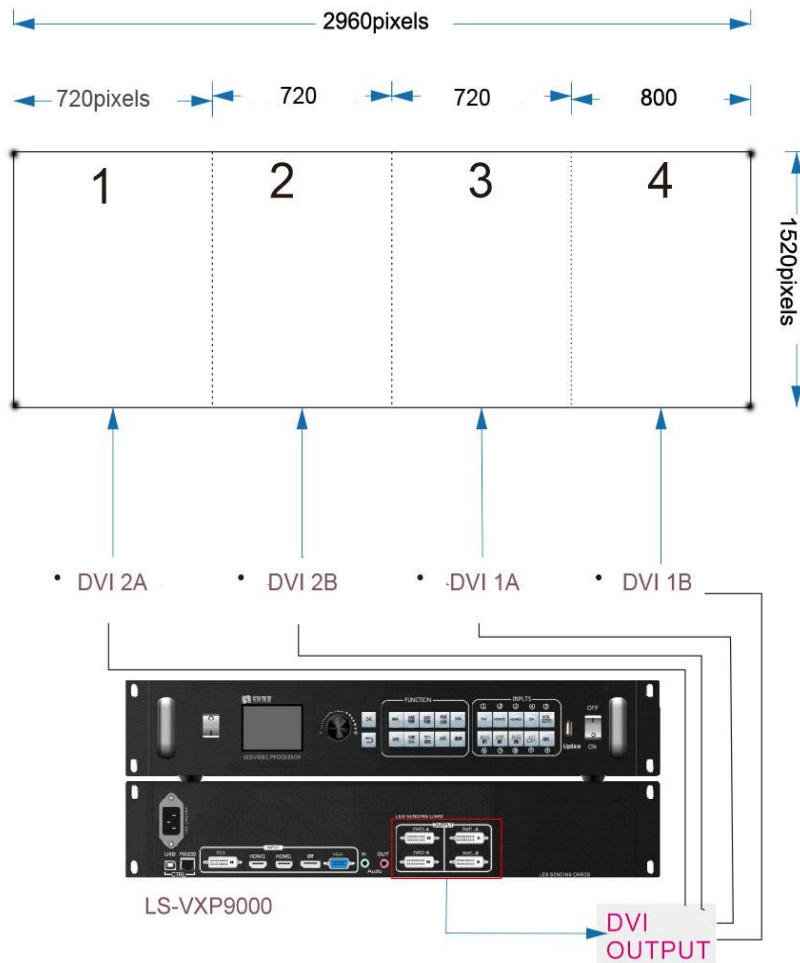


Set steps:

Step 1: Set the VXP9000 output resolution :1520*1520 pixels (DVI1 PK DVI2 ,Which is higher)


Step 2: Set the output setting--swap output 1,2--on ,Also link the DVI line as the map (DVI1 link to right part)



Step 3: Set the Sending card 1 (Link with DBI2A) start X:80 ,Y:0 ;
 Sending card 2 (Link with DVI2B) start X:800,Y:0;
 Sending card 4 (Link with DVI2B) start X:800,Y:0;
 set at the sending card software

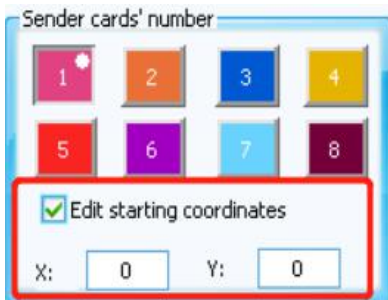

Listen Vision LED Splayer

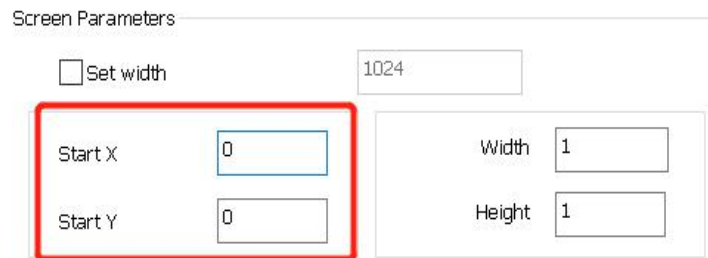

Linsn LEDSet



Step 4:Set the VXP9000 Window to :2960*1520 ,and modify the Horizontal start :80



Case Share 3:

Key point----

- 1, Resolution :2304*11280 pixel (W*H)
- 2, Load by 2pcs sending cards
- 3, Link the card as this map
- 4, DVI1A=1152*1520 pixels ;DVI2A=1280 pixels
 (DVI1A+1B >= DVI2A+2B)

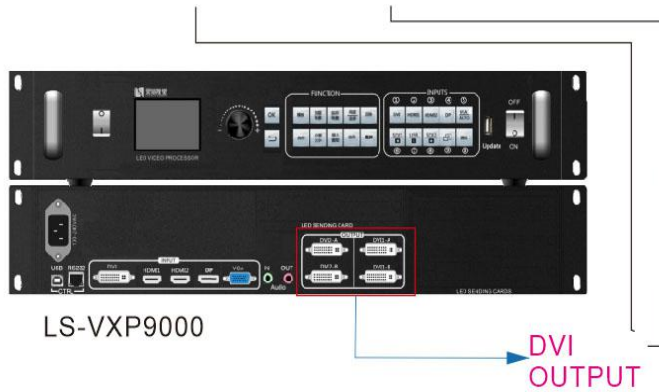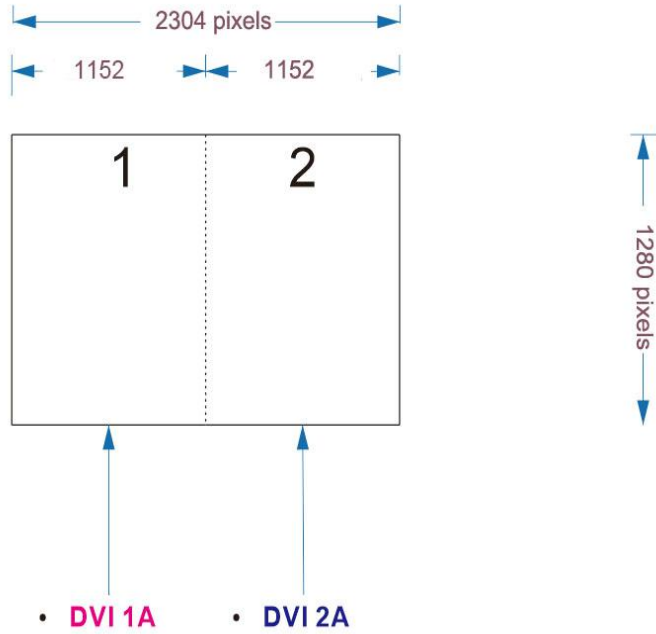

Set steps:

Step 1: Set the controller card to normal display

Step 2: Set the Output resolution to be 1152*1280 pixels



Step 3: Set the Windows resolution :2304*1280pixels

