
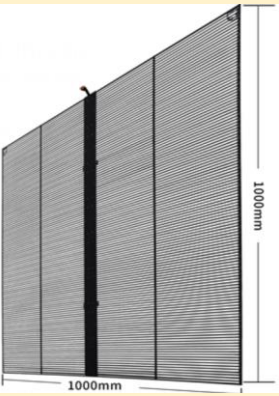


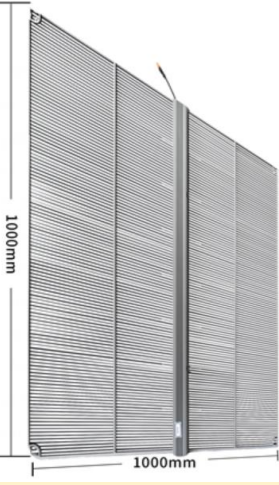

KT-P3.91-7.82 Indoor Full Color Module

Specification		
	Physical density	32768 dot/sqm
	Dot space	Horizontal 3.91mm Vertical 7.82mm
	Led lamps	huaxing SMD1921
	Drive mode	1/16 scan
	Transparency	75%
	Refresh rate	1920-3840hz
	Best view distance	4-50m
	View angle	Horizontal $\geq 120^\circ$ Vertical $\geq 120^\circ$
	White balance brightness	2000-2500cd
	Brightness Adjust	Automatic
	Ave. Power consumption	<280w/sqm
	Max. power consumption	<400w/sqm
	Cabinet size	1000*1000*70mm
	Cabinet resolution	256*128=32768dot
	Cabinet Weight	5.7kg/sqm
	Grey Scale	8192
	Protection level	IP43
	MTBF	10000hrs
	Pixel out of control	$\leq 4/100000$
	Use life	100000hrs
	Temperature	Storage $-20^\circ\text{C} \sim +60^\circ\text{C}$ Working $-10^\circ\text{C} \sim +50^\circ\text{C}$
Packing		
	Standard packing(pcs/CTN)	10pcs/ctns
	Carton Size	110*110*121cm